


Порядок настройки роутера Archer C60:

1. Необходимо подключить роутер к электросети, подключить сетевой провод в WAN порт;
2. Необходимо перевернуть роутер и подключиться к сети используя пароль, который указан в нижней части роутера (либо использовать текущий)




3. Далее необходимо перейти в браузер и в адресную строку набрать сайт tplinklogin.net может быть указан tplinkwifi.net или же для входа в настройки можно использовать 192.168.0.1 или 192.168.1.1 (данная информация указана в нижней части роутера). Авторизовываемся, используя логин и пароль по умолчанию: admin.


4. Выбираем раздел «Quick Setup»,выставляем часовой пояс -> «Next»

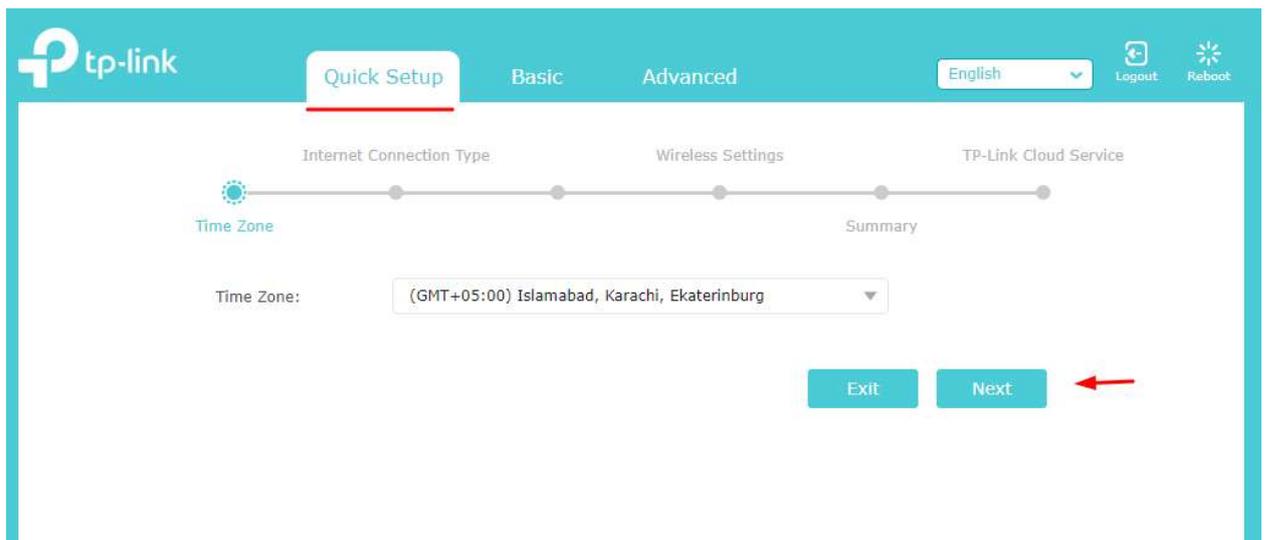

5. Выбираем тип подключения «Dynamic IP» -> «Next»

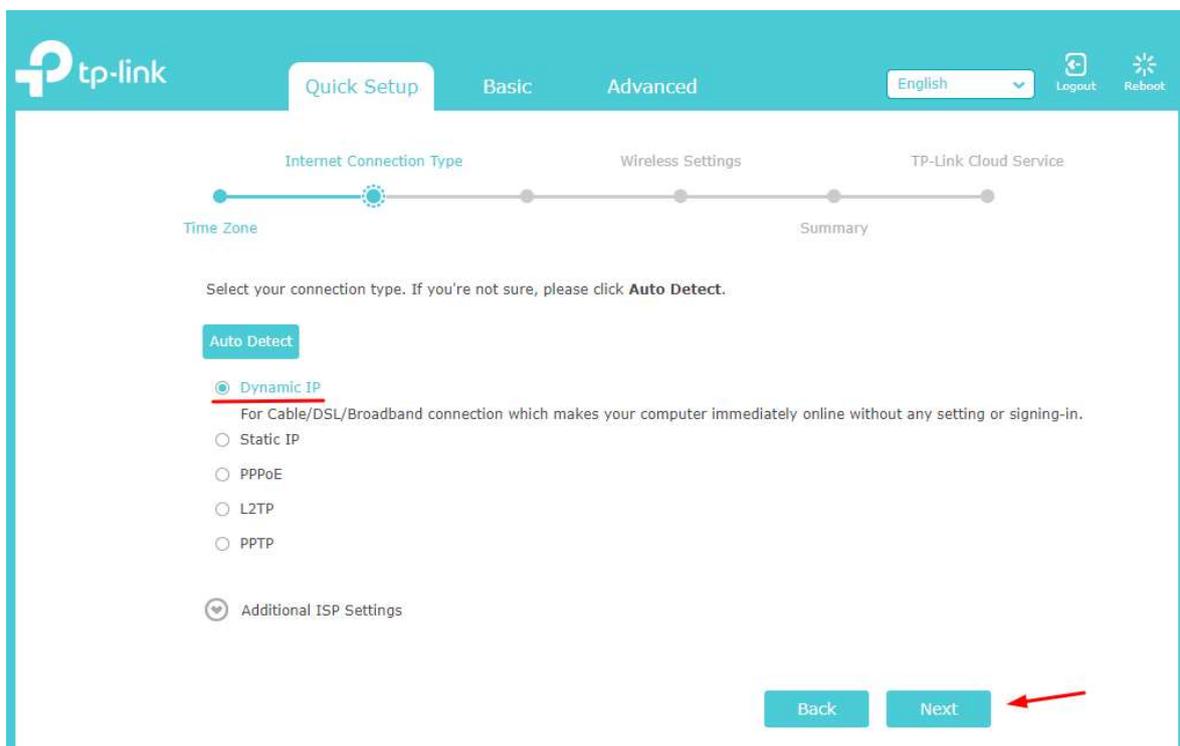


6. Выбираем «Do NOT clone MAC address» -> «Next»

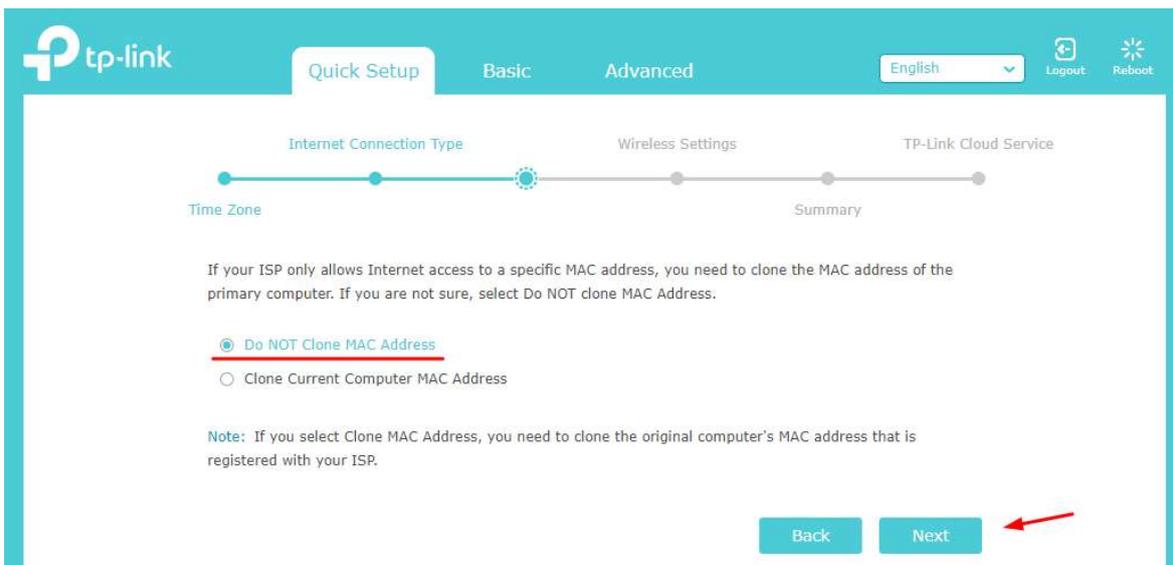

The screenshot shows the TP-Link Quick Setup interface. At the top, there are tabs for "Quick Setup", "Basic", and "Advanced". The "Quick Setup" tab is active. Below the tabs, there is a progress bar with five steps: "Time Zone", "Internet Connection Type", "Wireless Settings", "Summary", and "TP-Link Cloud Service". The "Wireless Settings" step is currently selected. Below the progress bar, there is a text block explaining that if the ISP only allows Internet access to a specific MAC address, the user needs to clone the MAC address of the primary computer. If the user is not sure, they should select "Do NOT clone MAC Address". There are two radio button options: "Do NOT Clone MAC Address" (which is selected) and "Clone Current Computer MAC Address". Below these options, there is a note: "Note: If you select Clone MAC Address, you need to clone the original computer's MAC address that is registered with your ISP." At the bottom right, there are two buttons: "Back" and "Next". A red arrow points to the "Next" button.

7. Необходимо в поле «Network Name (SSID)», задать название сети и в пункте «Password», задать пароль -> «Next».

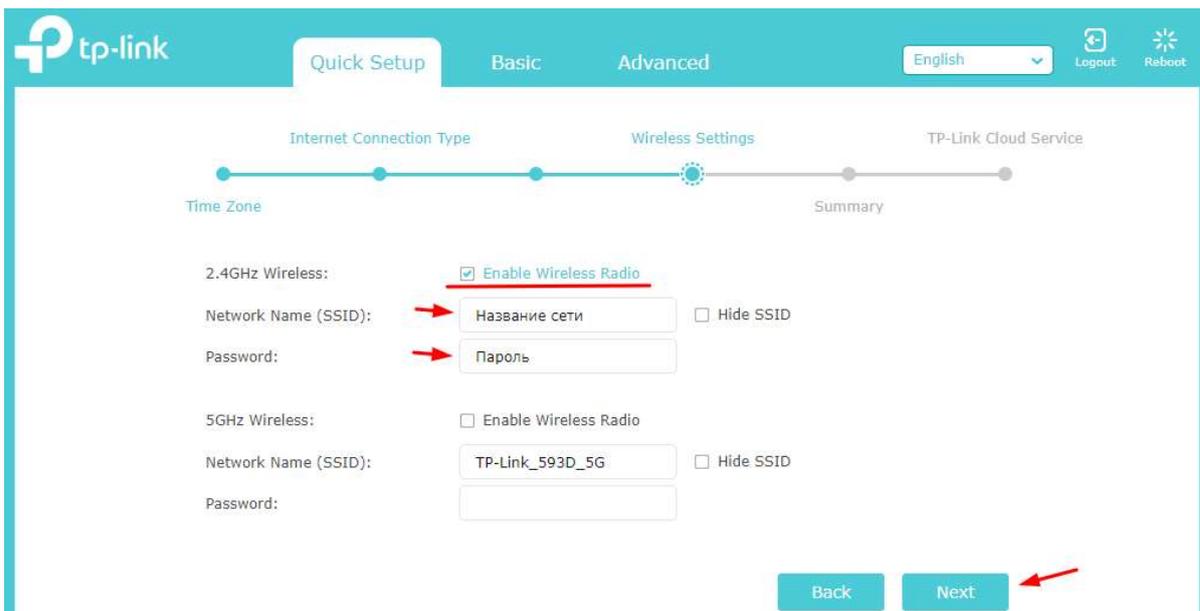

The screenshot shows the TP-Link Quick Setup interface. At the top, there are tabs for "Quick Setup", "Basic", and "Advanced". The "Quick Setup" tab is active. Below the tabs, there is a progress bar with five steps: "Time Zone", "Internet Connection Type", "Wireless Settings", "Summary", and "TP-Link Cloud Service". The "Wireless Settings" step is currently selected. Below the progress bar, there are two sections for wireless settings. The first section is for "2.4GHz Wireless:" and has a checked checkbox for "Enable Wireless Radio". Below this, there are two input fields: "Network Name (SSID):" with the text "Название сети" and a "Hide SSID" checkbox, and "Password:" with the text "Пароль". Red arrows point to these two input fields. The second section is for "5GHz Wireless:" and has an unchecked checkbox for "Enable Wireless Radio". Below this, there are two input fields: "Network Name (SSID):" with the text "TP-Link_593D_5G" and a "Hide SSID" checkbox, and "Password:". At the bottom right, there are two buttons: "Back" and "Next". A red arrow points to the "Next" button.

8. Нажимаем кнопку «Save» и после перезагрузки устройства (происходит автоматически) подключаемся к ранее созданной сети. На этом, настройка закончена.



Time Zone: (GMT+05:00) Islamabad, Karachi, Ekaterinburg

Internet Connection Type: Dynamic IP

2.4GHz Wireless: On

Network Name (SSID): Название сети

Password: 1234567890

5GHz Wireless: Off

Network Name (SSID): TP-Link_593D_5G

Password:

Back

Save

